


# BLOCKS- MOBILE CRANE BLOCKS

- **Product Range**

- **Capacity** 15 to 80 tons standard with higher capacities available
- **Sheave** sizes, to 24" for up to 1 ¼" wire rope, 1 to 7 sheaves

- **Technical Features**

- **Quick-reeving** configuration with optional drop-away sheave guards allows easy passage of rope with end fitting in place. Dead end centered above the sheaves on 1-4 sheave blocks, 5 and up dead end to side plate.
- **Hooks** are forged alloy steel, single or duplex, in accordance with DIN15401 or DIN15402. Single hook blocks include heavy-duty locking latches. Locking latches optional for duplex hooks. All hooks are individually certified for mechanical and physical properties including Charpy impact test, and include ultrasonic and magnetic particle evaluation.
- **Design Factor** 4 to 1 minimum.
- **Bearings** for sheaves are low-friction, double-row, full complement cylindrical roller type for tight sheave alignment and high resistance to axial forces caused by variation in fleet angles and require no friction spacers between sheaves. Hook bearings are tapered roller thrust type as used in all Miller Hi-Lift blocks.
- **Lubrication** for sheave bearings via channels in the sheave pin. Hook bearing grease fitting is located in the hook upper end.
- **Hook-locking** device is available for all models over 40 tons. Allows user to lock hook every 90°.
- **Side plates** and cheek weights are full-length and provided for a range of overhaul weights.

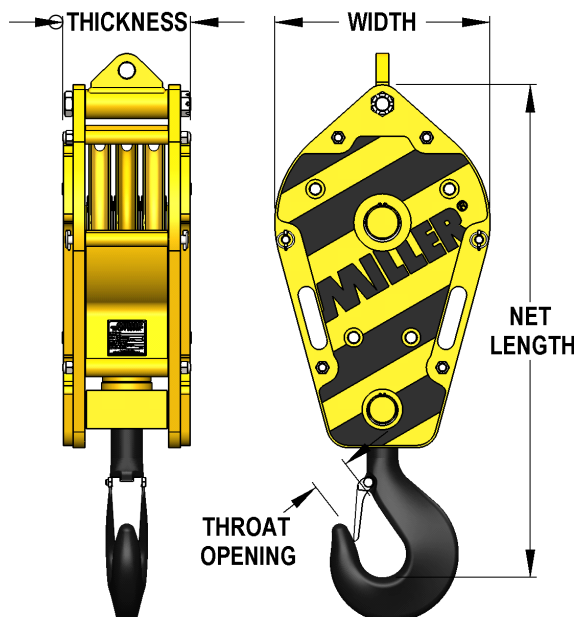

**Model Number Key**

#	##	MC	###	-	#	XX
<i>Number of Sheaves</i>	<i>Sheave O.D.</i>	<i>Mobile Crane Block</i>	<i>Working Load Limit</i>		<i>Cheek Weights</i>	<i>Option Code*</i>

- \*Option Codes*
- D - Duplex Hook*
  - DL - Duplex Hook, Locking Latches*
  - LD - Hook Locking Device, 4 Position*
  - DLD - Duplex Hook, 4 Position Locking Device*
  - DLLD - Duplex Hook, Locking Latches, 4 Position Locking Device*



# BLOCKS- MOBILE CRANE BLOCKS

## 15 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
15	110MC15	10	1	7.50	14.25	33.43	2.48	1/2 to 5/8"	240
15	110MC15-1	10	1	9.00	14.25	33.43	2.48	1/2 to 5/8"	310
15	112MC15	12	1	8.44	16.00	36.31	2.48	1/2 to 3/4"	315
15	112MC15-1	12	1	9.94	16.00	36.31	2.48	1/2 to 3/4"	400
15	114MC15	14	1	8.44	18.00	39.00	2.48	1/2 to 3/4"	360
15	114MC15-1	14	1	9.94	18.00	39.00	2.48	1/2 to 3/4"	470
15	116MC15	16	1	9.16	20.25	41.78	2.48	9/16 to 7/8"	460
15	116MC15-1	16	1	10.66	20.25	41.78	2.48	9/16 to 7/8"	590
15	118MC15	18	1	9.98	22.5	39.38	2.48	5/8 to 1"	365
15	118MC15-1	18	1	11.98	22.5	39.38	2.48	5/8 to 1"	535
15	210MC15	10	2	7.47	14.25	33.43	2.48	1/2 to 5/8"	255
15	210MC15-1	10	2	8.97	14.25	33.43	2.48	1/2 to 5/8"	325
15	212MC15	12	2	8.44	16.00	36.31	2.48	1/2 to 3/4"	335
15	212MC15-1	12	2	9.94	16.00	36.31	2.48	1/2 to 3/4"	420
15	214MC15	14	2	8.44	18.00	39.00	2.48	1/2 to 3/4"	380
15	214MC15-1	14	2	10.44	18.00	39.00	2.48	1/2 to 3/4"	490
15	216MC15	16	2	9.16	20.25	41.78	2.48	9/16 to 7/8"	490
15	216MC15-1	16	2	10.66	20.25	41.78	2.48	9/16 to 7/8"	625
15	218MC15	18	2	9.98	22.5	39.38	2.48	5/8 to 1"	405
15	218MC15-1	18	2	11.98	22.5	39.38	2.48	5/8 to 1"	575
15	310MC15	10	3	7.47	14.25	33.43	2.48	1/2 to 5/8"	295
15	310MC15-1	10	3	8.97	14.25	33.43	2.48	1/2 to 5/8"	345
15	312MC15	12	3	8.44	16.00	36.31	2.48	1/2 to 3/4"	365
15	312MC15-1	12	3	9.94	16.00	36.31	2.48	1/2 to 3/4"	450
15	314MC15	14	3	8.44	18.00	39.00	2.48	1/2 to 3/4"	425
15	314MC15-1	14	3	9.94	18.00	39.00	2.48	1/2 to 3/4"	530
15	316MC15	16	3	9.16	20.25	37.38	2.48	9/16 to 7/8"	540
15	316MC15-1	16	3	10.66	20.25	37.38	2.48	9/16 to 7/8"	675
15	318MC15	18	3	9.98	22.5	39.38	2.48	5/8 to 1"	445
15	318MC15-1	18	3	11.98	22.5	39.38	2.48	5/8 to 1"	615
15	412MC15	12	4	10.56	16.00	42.18	2.48	1/2 to 3/4"	430
15	412MC15-1	12	4	12.06	16.00	42.18	2.48	1/2 to 3/4"	515
15	414MC15	14	4	10.56	18.00	39.00	2.48	1/2 to 3/4"	485
15	414MC15-1	14	4	12.06	18.00	39.00	2.48	1/2 to 3/4"	595

# BLOCKS- MOBILE CRANE BLOCKS

## 20 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
20	110MC20-1	10	1	9.00	14.25	33.43	2.48	1/2 to 5/8"	310
20	112MC20	12	1	8.44	16.00	36.31	2.48	1/2 to 3/4"	315
20	112MC20-1	12	1	9.94	16.00	36.31	2.48	1/2 to 3/4"	400
20	114MC20	14	1	8.44	18.00	39.00	2.48	1/2 to 3/4"	360
20	114MC20-1	14	1	9.94	18.00	39.00	2.48	1/2 to 3/4"	470
20	116MC20	16	1	9.16	20.25	41.78	2.48	9/16 to 7/8"	460
20	116MC20-1	16	1	10.66	20.25	41.78	2.48	9/16 to 7/8"	590
20	118MC20	18	1	9.98	22.5	40.38	2.8	5/8 to 1"	375
20	118MC20-1	18	1	11.98	22.5	40.38	2.8	5/8 to 1"	525
20	210MC20	10	2	7.47	14.25	33.43	2.48	1/2 to 5/8"	255
20	210MC20-1	10	2	8.97	14.25	33.43	2.48	1/2 to 5/8"	325
20	212MC20	12	2	8.44	16.00	36.31	2.48	1/2 to 3/4"	335
20	212MC20-1	12	2	9.94	16.00	36.31	2.48	1/2 to 3/4"	420
20	214MC20	14	2	8.44	18.00	39.00	2.48	1/2 to 3/4"	380
20	214MC20-1	14	2	10.44	18.00	39.00	2.48	1/2 to 3/4"	490
20	216MC20	16	2	9.16	20.25	41.78	2.48	9/16 to 7/8"	490
20	216MC20-1	16	2	10.66	20.25	41.78	2.48	9/16 to 7/8"	625
20	218MC20	18	2	9.98	22.5	40.38	2.8	5/8 to 1"	415
20	218MC20-1	18	2	11.98	22.5	40.38	2.8	5/8 to 1"	565
20	310MC20	10	3	7.47	14.25	33.43	2.48	1/2 to 5/8"	295
20	310MC20-1	10	3	8.97	14.25	33.43	2.48	1/2 to 5/8"	345
20	312MC20	12	3	8.44	16.00	36.31	2.48	1/2 to 3/4"	365
20	312MC20-1	12	3	9.94	16.00	36.31	2.48	1/2 to 3/4"	450
20	314MC20	14	3	8.44	18.00	39.00	2.48	1/2 to 3/4"	425
20	314MC20-1	14	3	9.94	18.00	39.00	2.48	1/2 to 3/4"	530
20	316MC20	16	3	9.16	20.25	37.38	2.48	9/16 to 7/8"	540
20	316MC20-1	16	3	10.66	20.25	37.38	2.48	9/16 to 7/8"	675
20	318MC20	18	3	9.98	22.5	40.38	2.8	5/8 to 1"	455
20	318MC20-1	18	3	11.98	22.5	40.38	2.8	5/8 to 1"	605
20	412MC20	12	4	10.56	16.00	42.18	2.48	1/2 to 3/4"	430
20	412MC20-1	12	4	12.06	16.00	42.18	2.48	1/2 to 3/4"	515
20	414MC20	14	4	10.56	18.00	39.00	2.48	1/2 to 3/4"	485
20	414MC20-1	14	4	12.06	18.00	39.00	2.48	1/2 to 3/4"	595

## 25 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
25	116MC25-1	16	1	10.94	20.50	45.88	3.15	9/16 to 7/8"	670
25	118MC25	18	1	9.98	22.50	48.25	3.15	5/8 to 1"	595
25	118MC25-1	18	1	11.98	22.50	48.25	3.15	5/8 to 1"	800
25	120MC25	20	1	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	690
25	120MC25-1	20	1	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	935
25	214MC25	14	2	8.44	18.50	43.25	3.15	1/2 to 3/4"	440
25	214MC25-1	14	2	10.44	18.50	43.25	3.15	1/2 to 3/4"	580
25	216MC25	16	2	9.16	20.50	45.88	3.15	9/16 to 7/8"	540
25	216MC25-1	16	2	10.94	20.50	45.88	3.15	9/16 to 7/8"	705
25	218MC25	18	2	9.98	22.50	44.56	3.15	5/8 to 1"	655
25	218MC25-1	18	2	11.98	22.50	44.56	3.15	5/8 to 1"	860
25	220MC25	20	2	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	765
25	220MC25-1	20	2	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	1000
25	314MC25	14	3	8.44	18.50	43.25	3.15	1/2 to 3/4"	475
25	314MC25-1	14	3	10.44	18.50	43.25	3.15	1/2 to 3/4"	615
25	316MC25	16	3	9.16	20.50	43.88	3.15	9/16 to 7/8"	590
25	316MC25-1	16	3	10.94	20.50	43.88	3.15	9/16 to 7/8"	750
25	318MC25	18	3	9.98	22.50	48.25	3.15	5/8 to 1"	745
25	318MC25-1	18	3	11.98	22.50	48.25	3.15	5/8 to 1"	945
25	320MC25	20	3	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	855
25	320MC25-1	20	3	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	1100
25	414MC25	14	4	10.56	18.25	36.88	3.15	1/2 to 3/4"	480
25	414MC25-1	14	4	12.56	18.25	36.88	3.15	1/2 to 3/4"	580



# BLOCKS- MOBILE CRANE BLOCKS

## 30 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
30	116MC30-1	16	1	10.94	20.50	45.88	3.15	9/16 to 7/8"	670
30	118MC30	18	1	9.98	22.50	48.25	3.15	5/8 to 1"	595
30	118MC30-1	18	1	11.98	22.50	48.25	3.15	5/8 to 1"	800
30	120MC30	20	1	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	690
30	120MC30-1	20	1	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	935
30	214MC30	14	2	8.44	18.50	43.25	3.15	1/2 to 3/4"	440
30	214MC30-1	14	2	10.44	18.50	43.25	3.15	1/2 to 3/4"	580
30	216MC30	16	2	9.16	20.50	45.88	3.15	9/16 to 7/8"	540
30	216MC30-1	16	2	10.94	20.50	45.88	3.15	9/16 to 7/8"	705
30	218MC30	18	2	9.98	22.50	44.56	3.15	5/8 to 1"	655
30	218MC30-1	18	2	11.98	22.50	44.56	3.15	5/8 to 1"	860
30	220MC30	20	2	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	765
30	220MC30-1	20	2	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	1000
30	314MC30	14	3	8.44	18.50	43.25	3.15	1/2 to 3/4"	475
30	314MC30-1	14	3	10.44	18.50	43.25	3.15	1/2 to 3/4"	615
30	316MC30	16	3	9.16	20.50	43.88	3.15	9/16 to 7/8"	590
30	316MC30-1	16	3	10.94	20.50	43.88	3.15	9/16 to 7/8"	750
30	318MC30	18	3	9.98	22.50	48.25	3.15	5/8 to 1"	745
30	318MC30-1	18	3	11.98	22.50	48.25	3.15	5/8 to 1"	945
30	320MC30	20	3	9.98	24.50	52.00	3.15	3/4 to 1-1/8"	855
30	320MC30-1	20	3	11.98	24.50	52.00	3.15	3/4 to 1-1/8"	1100
30	414MC30	14	4	10.56	18.25	37.88	3.15	1/2 to 3/4"	480
30	414MC30-1	14	4	12.56	18.25	37.88	3.15	1/2 to 3/4"	580

## 35 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
35	124MC35-1	24	1	14.02	28.50	58.25	3.54	7/8 to 1-1/4"	1475
35	220MC35	20	2	10.48	24.50	52.00	3.54	3/4 to 1-1/8"	910
35	220MC35-1	20	2	12.48	24.50	52.00	3.54	3/4 to 1-1/8"	1160
35	224MC35	24	2	12.02	28.50	58.25	3.54	7/8 to 1-1/4"	1260
35	224MC35-1	24	2	14.02	28.50	58.25	3.54	7/8 to 1-1/4"	1610
35	314MC35	14	3	8.94	18.50	42.88	3.54	1/2 to 3/4"	525
35	314MC35-1	14	3	10.94	18.50	42.88	3.54	1/2 to 3/4"	635
35	316MC35	16	3	9.66	20.50	46.75	3.54	9/16 to 7/8"	720
35	316MC35-1	16	3	11.66	20.50	46.75	3.54	9/16 to 7/8"	900
35	318MC35	18	3	10.48	22.50	49.38	3.54	5/8 to 1"	860
35	318MC35-1	18	3	12.48	22.50	49.38	3.54	5/8 to 1"	1065
35	320MC35	20	3	10.48	24.50	52.00	3.54	3/4 to 1-1/8"	1000
35	320MC35-1	20	3	12.48	24.50	52.00	3.54	3/4 to 1-1/8"	1250
35	414MC35	14	4	11.06	18.25	43.63	3.54	1/2 to 3/4"	580
35	414MC35-1	14	4	13.06	18.25	43.63	3.54	1/2 to 3/4"	690
35	416MC35	16	4	12.02	20.50	46.75	3.54	9/16 to 7/8"	825
35	416MC35-1	16	4	14.02	20.50	46.75	3.54	9/16 to 7/8"	1000
35	418MC35	18	4	13.13	22.50	49.38	3.54	5/8 to 1"	980
35	418MC35-1	18	4	15.13	22.50	49.38	3.54	5/8 to 1"	1190
35	514MC35	14	5	13.19	18.25	43.63	3.54	1/2 to 3/4"	645
35	514MC35-1	14	5	15.19	18.25	43.63	3.54	1/2 to 3/4"	755
35	516MC35	16	5	14.38	20.31	47.19	3.54	9/16 to 7/8"	715
35	516MC35-1	16	5	16.38	20.31	47.19	3.54	9/16 to 7/8"	875
35	616MC35	16	6	16.75	20.31	48.19	3.54	9/16 to 7/8"	790
35	616MC35-1	16	6	18.75	20.31	48.19	3.54	9/16 to 7/8"	950

# BLOCKS- MOBILE CRANE BLOCKS

## 40 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
40	124MC40-1	24	1	14.02	28.50	58.25	3.54	7/8 to 1-1/4"	1475
40	220MC40	20	2	10.48	24.50	52.00	3.54	3/4 to 1-1/8"	910
40	220MC40-1	20	2	12.48	24.50	52.00	3.54	3/4 to 1-1/8"	1160
40	224MC40	24	2	12.02	28.50	58.25	3.54	7/8 to 1-1/4"	1260
40	224MC40-1	24	2	14.02	28.50	58.25	3.54	7/8 to 1-1/4"	1610
40	314MC40	14	3	8.94	18.50	42.88	3.54	1/2 to 3/4"	525
40	314MC40-1	14	3	10.94	18.50	42.88	3.54	1/2 to 3/4"	635
40	316MC40	16	3	9.66	20.50	46.75	3.54	9/16 to 7/8"	720
40	316MC40-1	16	3	11.66	20.50	46.75	3.54	9/16 to 7/8"	900
40	318MC40	18	3	10.48	22.50	49.38	3.54	5/8 to 1"	860
40	318MC40-1	18	3	12.48	22.50	49.38	3.54	5/8 to 1"	1065
40	320MC40	20	3	10.48	24.50	52.00	3.54	3/4 to 1-1/8"	1000
40	320MC40-1	20	3	12.48	24.50	52.00	3.54	3/4 to 1-1/8"	1250
40	414MC40	14	4	11.06	18.25	43.63	3.54	1/2 to 3/4"	580
40	414MC40-1	14	4	13.06	18.25	43.63	3.54	1/2 to 3/4"	690
40	416MC40	16	4	12.02	20.50	46.75	3.54	9/16 to 7/8"	825
40	416MC40-1	16	4	14.02	20.50	46.75	3.54	9/16 to 7/8"	1000
40	418MC40	18	4	13.13	22.50	49.38	3.54	5/8 to 1"	980
40	418MC40-1	18	4	15.13	22.50	49.38	3.54	5/8 to 1"	1190
40	514MC40	14	5	13.19	18.25	43.63	3.54	1/2 to 3/4"	645
40	514MC40-1	14	5	15.19	18.25	43.63	3.54	1/2 to 3/4"	755
40	516MC40	16	5	14.38	20.31	47.19	3.54	9/16 to 7/8"	715
40	516MC40-1	16	5	16.38	20.31	47.19	3.54	9/16 to 7/8"	875
40	616MC40	16	6	16.75	20.31	48.19	3.54	9/16 to 7/8"	790
40	616MC40-1	16	6	18.75	20.31	48.19	3.54	9/16 to 7/8"	950

## 45 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
45	220MC45-1	20	2	12.48	24.50	55.21	3.94	3/4 to 1-1/8"	1245
45	224MC45	24	2	12.02	28.50	59.50	3.94	7/8 to 1-1/4"	1320
45	224MC45-1	24	2	14.02	28.50	59.50	3.94	7/8 to 1-1/4"	1675
45	314MC45	14	3	8.94	18.25	43.59	3.94	1/2 to 3/4"	525
45	314MC45-1	14	3	10.94	18.25	43.59	3.94	1/2 to 3/4"	655
45	316MC45	16	3	9.66	20.50	49.50	3.94	9/16 to 7/8"	780
45	316MC45-1	16	3	11.66	20.50	49.50	3.94	9/16 to 7/8"	970
45	318MC45	18	3	10.48	22.50	51.65	3.94	5/8 to 1"	935
45	318MC45-1	18	3	12.48	22.50	51.65	3.94	5/8 to 1"	1155
45	320MC45	20	3	10.48	24.50	55.21	3.94	3/4 to 1-1/8"	1070
45	320MC45-1	20	3	12.48	24.50	55.21	3.94	3/4 to 1-1/8"	1335
45	324MC45	24	3	12.02	28.50	59.50	3.94	7/8 to 1-1/4"	1480
45	324MC45-1	24	3	14.02	28.50	59.50	3.94	7/8 to 1-1/4"	1840
45	414MC45	14	4	11.06	18.25	43.59	3.94	1/2 to 3/4"	570
45	414MC45-1	14	4	13.06	18.25	43.59	3.94	1/2 to 3/4"	700
45	416MC45	16	4	12.02	20.50	49.25	3.94	9/16 to 7/8"	890
45	416MC45-1	16	4	14.02	20.50	49.25	3.94	9/16 to 7/8"	1080
45	418MC45	18	4	13.13	22.50	51.65	3.94	5/8 to 1"	1060
45	418MC45-1	18	4	15.13	22.50	51.65	3.94	5/8 to 1"	1380
45	420MC45	20	4	13.13	24.50	55.21	3.94	3/4 to 1-1/8"	1225
45	420MC45-1	20	4	15.13	24.50	55.21	3.94	3/4 to 1-1/8"	1490
45	514MC45	14	5	13.19	18.25	43.59	3.94	1/2 to 3/4"	630
45	514MC45-1	14	5	15.19	18.25	43.59	3.94	1/2 to 3/4"	760
45	516MC45	16	5	14.38	20.31	47.38	3.94	9/16 to 7/8"	720
45	516MC45-1	16	5	16.38	20.31	47.38	3.94	9/16 to 7/8"	895
45	518MC45	18	5	15.75	22.5	49.38	3.94	5/8 to 1"	820
45	518MC45-1	18	5	17.75	22.5	49.38	3.94	5/8 to 1"	1045
45	616MC45	16	6	16.75	20.31	47.38	3.94	9/16 to 7/8"	780
45	616MC45-1	16	6	18.75	20.31	47.38	3.94	9/16 to 7/8"	955



# BLOCKS- MOBILE CRANE BLOCKS

## 50 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
50	220MC50-1	20	2	12.48	24.50	55.21	3.94	3/4 to 1-1/8"	1245
50	224MC50	24	2	12.02	28.50	59.50	3.94	7/8 to 1-1/4"	1320
50	224MC50-1	24	2	14.02	28.50	59.50	3.94	7/8 to 1-1/4"	1675
50	314MC50	14	3	8.94	18.25	43.59	3.94	1/2 to 3/4"	525
50	314MC50-1	14	3	10.94	18.25	43.59	3.94	1/2 to 3/4"	655
50	316MC50	16	3	9.66	20.50	49.50	3.94	9/16 to 7/8"	780
50	316MC50-1	16	3	11.66	20.50	49.50	3.94	9/16 to 7/8"	970
50	318MC50	18	3	10.48	22.50	51.65	3.94	5/8 to 1"	935
50	318MC50-1	18	3	12.48	22.50	51.65	3.94	5/8 to 1"	1155
50	320MC50	20	3	10.48	24.50	55.21	3.94	3/4 to 1-1/8"	1070
50	320MC50-1	20	3	12.48	24.50	55.21	3.94	3/4 to 1-1/8"	1335
50	324MC50	24	3	12.02	28.50	59.50	3.94	7/8 to 1-1/4"	1480
50	324MC50-1	24	3	14.02	28.50	59.50	3.94	7/8 to 1-1/4"	1840
50	414MC50	14	4	11.06	18.25	43.59	3.94	1/2 to 3/4"	570
50	414MC50-1	14	4	13.06	18.25	43.59	3.94	1/2 to 3/4"	700
50	416MC50	16	4	12.02	20.50	49.25	3.94	9/16 to 7/8"	890
50	416MC50-1	16	4	14.02	20.50	49.25	3.94	9/16 to 7/8"	1080
50	418MC50	18	4	13.13	22.50	51.65	3.94	5/8 to 1"	1060
50	418MC50-1	18	4	15.13	22.50	51.65	3.94	5/8 to 1"	1380
50	420MC50	20	4	13.13	24.50	55.21	3.94	3/4 to 1-1/8"	1225
50	420MC50-1	20	4	15.13	24.50	55.21	3.94	3/4 to 1-1/8"	1490
50	514MC50	14	5	13.19	18.25	43.59	3.94	1/2 to 3/4"	630
50	514MC50-1	14	5	15.19	18.25	43.59	3.94	1/2 to 3/4"	760
50	516MC50	16	5	14.38	20.31	47.38	3.94	9/16 to 7/8"	720
50	516MC50-1	16	5	16.38	20.31	47.38	3.94	9/16 to 7/8"	895
50	518MC50	18	5	15.75	22.5	49.38	3.94	5/8 to 1"	820
50	518MC50-1	18	5	17.75	22.5	49.38	3.94	5/8 to 1"	1045
50	616MC50	16	6	16.75	20.31	47.38	3.94	9/16 to 7/8"	780
50	616MC50-1	16	6	18.75	20.31	47.38	3.94	9/16 to 7/8"	955

## 60 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
55	224MC55-1	24	2	14.52	28.88	60.06	4.41	7/8 to 1-1/4"	1475
55	318MC55	18	3	10.98	22.50	53.66	4.41	5/8 to 1"	1080
55	318MC55-1	18	3	12.98	22.50	53.66	4.41	5/8 to 1"	1300
55	320MC55	20	3	10.98	24.50	56.79	4.41	3/4 to 1-1/8"	1235
55	320MC55-1	20	3	12.98	24.50	56.79	4.41	3/4 to 1-1/8"	1500
55	324MC55	24	3	12.52	28.50	61.41	4.41	7/8 to 1-1/4"	1700
55	324MC55-1	24	3	14.52	28.50	61.41	4.41	7/8 to 1-1/4"	2055
55	416MC55	16	4	12.52	20.31	50.13	4.41	9/16 to 7/8"	1000
55	416MC55-1	16	4	14.52	20.31	50.13	4.41	9/16 to 7/8"	1185
55	418MC55	18	4	13.63	22.5	52.88	4.41	5/8 to 1"	1080
55	418MC55-1	18	4	15.63	22.5	52.88	4.41	5/8 to 1"	1310
55	420MC55	20	4	13.63	24.50	56.79	4.41	3/4 to 1-1/8"	1400
55	420MC55-1	20	4	15.63	24.50	56.79	4.41	3/4 to 1-1/8"	1670
55	516MC55	16	5	14.88	20.31	50.13	4.41	9/16 to 7/8"	1100
55	516MC55-1	16	5	16.88	20.31	50.13	4.41	9/16 to 7/8"	1285
55	518MC55	18	5	16.25	22.5	52.88	4.41	5/8 to 1"	1160
55	518MC55-1	18	5	18.25	22.5	52.88	4.41	5/8 to 1"	1490
55	520MC55	20	5	16.25	24.50	56.79	4.41	3/4 to 1-1/8"	1565
55	520MC55-1	20	5	18.25	24.50	56.79	4.41	3/4 to 1-1/8"	1830
55	620MC55	20	6	18.89	24.63	56.06	4.41	3/4 to 1-1/8"	1420
55	620MC55-1	20	6	20.89	24.63	56.06	4.41	3/4 to 1-1/8"	1700



# BLOCKS- MOBILE CRANE BLOCKS

## 65 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
65	224MC65-1	24	2	14.52	28.88	60.06	4.41	7/8 to 1-1/4"	1475
65	318MC65	18	3	10.98	22.50	53.66	4.41	5/8 to 1"	1080
65	318MC65-1	18	3	12.98	22.50	53.66	4.41	5/8 to 1"	1300
65	320MC65	20	3	10.98	24.50	56.79	4.41	3/4 to 1-1/8"	1235
65	320MC65-1	20	3	12.98	24.50	56.79	4.41	3/4 to 1-1/8"	1500
65	324MC65	24	3	12.52	28.50	61.41	4.41	7/8 to 1-1/4"	1700
65	324MC65-1	24	3	14.52	28.50	61.41	4.41	7/8 to 1-1/4"	2055
65	416MC65	16	4	12.52	20.31	50.13	4.41	9/16 to 7/8"	1000
65	416MC65-1	16	4	14.52	20.31	50.13	4.41	9/16 to 7/8"	1185
65	418MC65	18	4	13.63	22.5	52.88	4.41	5/8 to 1"	1080
65	418MC65-1	18	4	15.63	22.5	52.88	4.41	5/8 to 1"	1310
65	420MC65	20	4	13.63	24.50	56.79	4.41	3/4 to 1-1/8"	1400
65	420MC65-1	20	4	15.63	24.50	56.79	4.41	3/4 to 1-1/8"	1670
65	516MC65	16	5	14.88	20.31	50.13	4.41	9/16 to 7/8"	1100
65	516MC65-1	16	5	16.88	20.31	50.13	4.41	9/16 to 7/8"	1285
65	518MC65	18	5	16.25	22.5	52.88	4.41	5/8 to 1"	1160
65	518MC65-1	18	5	18.25	22.5	52.88	4.41	5/8 to 1"	1490
65	520MC65	20	5	16.25	24.50	56.79	4.41	3/4 to 1-1/8"	1565
65	520MC65-1	20	5	18.25	24.50	56.79	4.41	3/4 to 1-1/8"	1830
65	620MC65	20	6	18.89	24.63	56.06	4.41	3/4 to 1-1/8"	1420
65	620MC65-1	20	6	20.89	24.63	56.06	4.41	3/4 to 1-1/8"	1700

## 75 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
70	320MC70-1	20	3	13.48	24.50	61.00	4.92	3/4 to 1-1/8"	1810
70	324MC70	24	3	13.02	28.50	65.18	4.92	7/8 to 1-1/4"	2000
70	324MC70-1	24	3	15.02	28.50	65.18	4.92	7/8 to 1-1/4"	2380
70	418MC70	18	4	14.13	22.5	58.75	4.92	5/8 to 1"	1430
70	418MC70-1	18	4	16.13	22.5	58.75	4.92	5/8 to 1"	1680
70	420MC70	20	4	14.13	24.50	61.00	4.92	3/4 to 1-1/8"	1685
70	420MC70-1	20	4	16.13	24.50	61.00	4.92	3/4 to 1-1/8"	1980
70	424MC70	24	4	16.16	28.50	65.18	4.92	7/8 to 1-1/4"	2270
70	424MC70-1	24	4	18.16	28.50	65.18	4.92	7/8 to 1-1/4"	2660
70	518MC70	18	5	16.75	22.5	58.75	4.92	5/8 to 1"	1540
70	518MC70-1	18	5	18.75	22.5	58.75	4.92	5/8 to 1"	1790
70	520MC70	20	5	16.75	24.63	62.31	4.92	3/4 to 1-1/8"	1615
70	520MC70-1	20	5	18.75	24.63	62.31	4.92	3/4 to 1-1/8"	1915
70	524MC70	24	5	19.31	28.50	65.18	4.92	7/8 to 1-1/4"	2535
70	524MC70-1	24	5	21.31	28.50	65.18	4.92	7/8 to 1-1/4"	2925
70	620MC70	20	6	19.39	22.5	62.31	4.92	3/4 to 1-1/8"	1785
70	620MC70-1	20	6	21.39	22.5	62.31	4.92	3/4 to 1-1/8"	2085

## BLOCKS- MOBILE CRANE BLOCKS

### 80 TON

WWL * Tons	Model Number	Sheave Diameter (in)	Number of Sheaves	Thickness (in)	Width (in)	Net Length (in)	Throat Opening (in)	Wire Rope Range (in)	Weight (lbs)
80	320MC80-1	20	3	13.48	24.50	61.00	4.92	3/4 to 1-1/8"	1810
80	324MC80	24	3	13.02	28.50	65.18	4.92	7/8 to 1-1/4"	2000
80	324MC80-1	24	3	15.02	28.50	65.18	4.92	7/8 to 1-1/4"	2380
80	418MC80	18	4	14.13	22.5	58.75	4.92	5/8 to 1"	1430
80	418MC80-1	18	4	16.13	22.5	58.75	4.92	5/8 to 1"	1680
80	420MC80	20	4	14.13	24.50	61.00	4.92	3/4 to 1-1/8"	1685
80	420MC80-1	20	4	16.13	24.50	61.00	4.92	3/4 to 1-1/8"	1980
80	424MC80	24	4	16.16	28.50	65.18	4.92	7/8 to 1-1/4"	2270
80	424MC80-1	24	4	18.16	28.50	65.18	4.92	7/8 to 1-1/4"	2660
80	518MC80	18	5	16.75	22.5	58.75	4.92	5/8 to 1"	1540
80	518MC80-1	18	5	18.75	22.5	58.75	4.92	5/8 to 1"	1790
80	520MC80	20	5	16.75	24.63	62.31	4.92	3/4 to 1-1/8"	1615
80	520MC80-1	20	5	18.75	24.63	62.31	4.92	3/4 to 1-1/8"	1915
80	524MC80	24	5	19.31	28.50	65.18	4.92	7/8 to 1-1/4"	2535
80	524MC80-1	24	5	21.31	28.50	65.18	4.92	7/8 to 1-1/4"	2925
80	620MC80	20	6	19.39	22.5	64.31	4.92	3/4 to 1-1/8"	1785
80	620MC80-1	20	6	21.39	22.5	64.31	4.92	3/4 to 1-1/8"	2085

# MILLER

## Load Handling SOLUTIONS

- ▶ Hook Products
- ▶ Swivels
- ▶ Blocks
- ▶ Sheaves



*PLET Anchoring Hook Assembly  
300 metric tons working load*

[www.millerproducts.net](http://www.millerproducts.net)